



TOP VIEW

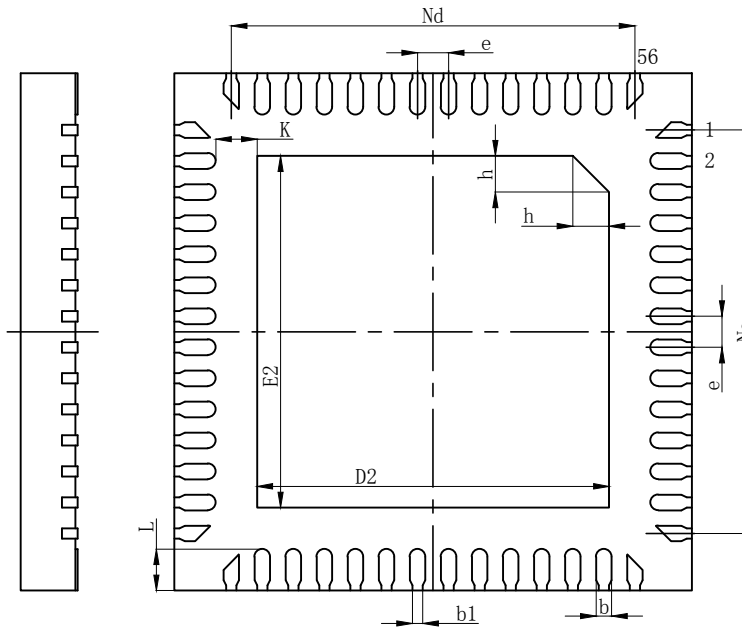

BOTTOM VIEW

| SYMBOL | MILLIMETER | | |
|--------|------------|------|-------|
| | MIN | NOM | MAX |
| A | 0.50 | 0.55 | 0.60 |
| A1 | 0 | 0.02 | 0.05 |
| b | 0.10 | 0.15 | 0.20 |
| b1 | 0.10REF | | |
| c | 0.152REF | | |
| D | 4.90 | 5.00 | 5.10 |
| D2 | 3.30 | 3.40 | 3.750 |
| e | 0.30BSC | | |
| Ne | 3.90BSC | | |
| Nd | 3.90BSC | | |
| E | 4.90 | 5.00 | 5.10 |
| E2 | 3.30 | 3.40 | 3.50 |
| L | 0.35 | 0.40 | 0.45 |
| K | 0.35 | 0.40 | 0.45 |
| h | 0.30 | 0.35 | 0.40 |

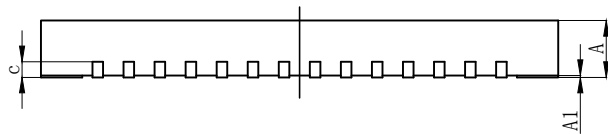

SIDE VIEW



特殊设计：引脚pitch为0.30mm

| | | | |
|--|------|---------------------|----|
| 更改标记 | 更改内容 | 签名 | 日期 |
|  华天科技（西安）有限公司 HuaTian Technology (Xi'an) CO., LTD | | | |
| QFN56L (0505X0.55-0.30) (A) 产品外形图 | | 图号: HTDX05605050001 | |
| | | 单位 | 版次 |
| | | mm | 0版 |
| 第 1 张 | | 共 1 张 | |

参考图号 客户要求

| | | | |
|------|----|-------|--|
| 拟 制 | | 复 审 | |
| 审 核 | | 会 签 | |
| | | 标 准 化 | |
| 制 图 | | 批 准 | |
| 幅 面: | A4 | 比 例: | |

